



# GREASE PUMPS

# Series 700


**Ratio 65:1 Capacity 1900 g/min**

**Polyurethane Seals**

Series 700 air-operated pumps for short/long distance grease distribution, for high pressure greasing. Ideal for dispensing medium/high-viscosity grease. Suitable for centralised fixed systems. Recommended when delivery of a greater quantity of grease with high pressure is required.

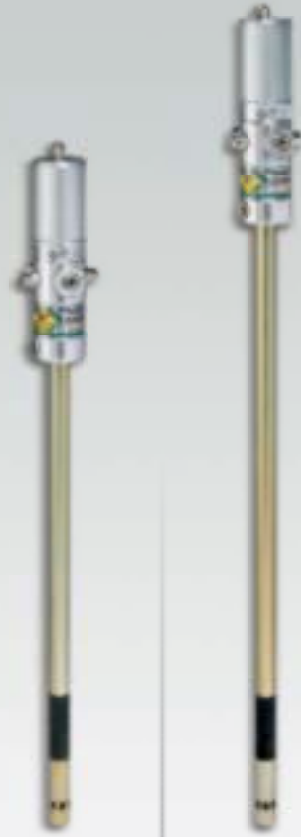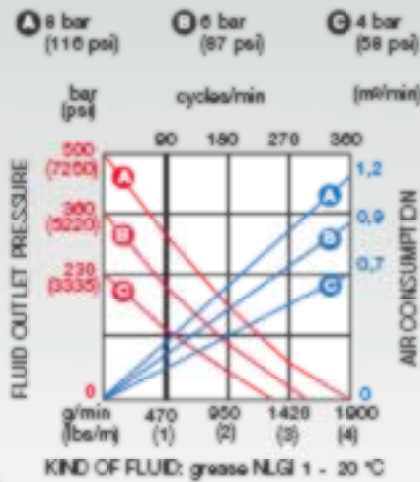

Article	63065	63066	63074	63095
Compression ratio	65:1	65:1	65:1	65:1
Air inlet connection	F1/4" G	F1/4" G	F1/4" G	F1/4" G
Grease outlet connection	F3/8" G	F3/8" G	F3/8" G	F3/8" G
Air grease working pressure	6-8 bar	6-8 bar	6-8 bar	6-8 bar
Air max. pressure	8 bar	8 bar	8 bar	8 bar
Average air consumption	440 l/min	440 l/min	440 l/min	440 l/min
Relative flowrate (free outlet at 6 bar)	1900 g/min	1900 g/min	1900 g/min	1900 g/min
Noise level	81 dB	81 dB	81 dB	81 dB
Suitable for drums	50 - 200 Kg	50 - 200 Kg	50 - 60 Kg	180 - 220 Kg
Suction tube length	470 mm	470 mm	740 mm	940 mm
Suction tube diameter	30 mm	30 mm	30 mm	30 mm
	No. 1 packing m <sup>3</sup> 0,020 kg 6,8	No. 1 packing m <sup>3</sup> 0,020 kg 6,7	No. 1 packing m <sup>3</sup> 0,020 kg 7,4	No. 1 packing m <sup>3</sup> 0,020 kg 8,2

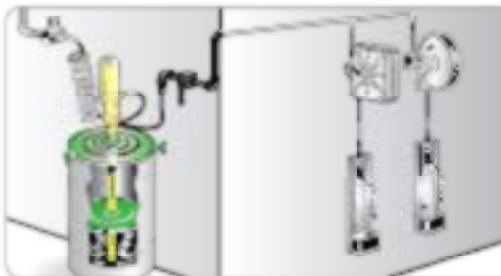

The pumps are equipped with a filter at the air inlet and a filter at the bottom of the suction tube in the sucked grease passage. They have a double valve enabling delivery of the grease in a continuous and constant flow. These devices prevent obstructions and consequent interruptions due to the passage of impurities.