



PUMPS FOR OIL AND SIMILAR

Ratio 3:1 Capacity 14 l/min


NBR Seals

Series 600 air-operated pumps for medium-distance oil distribution.

Ideal for distributing medium/high-viscosity oil and antifreeze liquid. Suitable for movable installations and fixed systems.





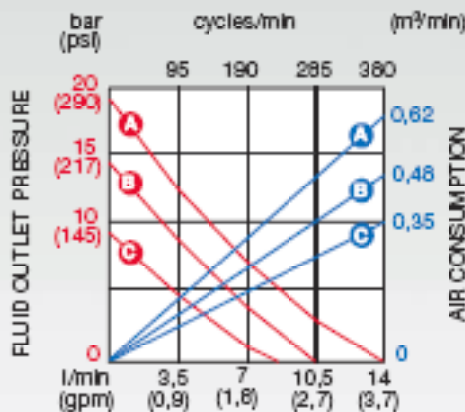


The wall-mounted version of these pumps, mounted on wall or in a fixed position by means of the special accessories (refer to page 204), enables numerous uses through the application of modular extensions (refer to page 232).

A 8 bar (116 psi) **B** 6 bar (87 psi) **C** 4 bar (58 psi)



KIND OF FLUID: SAE90 oil (ISO VG 100) - 20 °C



Articolo	35160	35161
Compatible fluids	Suitable for medium/high-viscosity oil	
Compression ratio	3:1	3:1
Air inlet connection	F1/4" G	F1/4" G
Fluid outlet connection	F1/2" G	F1/2" G
Air working pressure	6-8 bar	6-8 bar
Air max. pressure	8 bar	8 bar
Average air consumption	330 l/min	330 l/min
Relative flowrate (free outlet at 8 bar)	14 l/min	14 l/min
Noise level	81 dB	81 dB
Deliverable oil temperature	-10+50°C	-10+50°C
Max. deliverable oil viscosity	130 SAE	130 SAE
Bung adaptor Art. 39042	-	standard
Suction tube length	-	-
Suction tube diameter	-	42 mm
Suitable for drums or tanks	modular	customisable 1*
 modular  customisable 1*  with drum	 No. 1 packing m ³ 0,010  kg 4,4	 No. 1 packing m ³ 0,010  kg 5,0