




PUMPS FOR OIL AND SIMILAR

Ratio 5:1 Capacity 18 l/min

NBR Seals

Series 650 air-operated double-acting pumps for medium-distance oil distribution. Ideal for also distributing high-viscosity oil. The double action guarantees the delivery of a continuous and constant flow, ideal for all installations, excellent for centralised distribution systems.

The wall-mounted version of these pumps, mounted on wall or in a fixed position by means of the special accessories (refer to page 204), enables numerous uses through the application of modular extensions (refer to page 232).

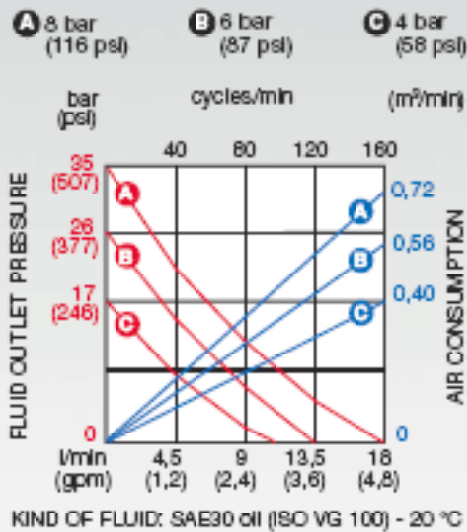

Articolo

36060

36061

Compatible fluids	Suitable for medium/high-viscosity oil	
Compression ratio	5:1	5:1
Air inlet connection	F1/4" G	F1/4" G
Fluid outlet connection	F1/2" G	F1/2" G
Air working pressure	6-8 bar	6-8 bar
Air max. pressure	8 bar	8 bar
Average air consumption	350 l/min	350 l/min
Relative flowrate (free outlet at 8 bar)	18 l/min	18 l/min
Noise level	81 dB	81 dB
Deliverable oil temperature	-10+50°C	-10+50°C
Max. deliverable oil viscosity	240 SAE	240 SAE
Bung adaptor Art. 39042	-	standard
Suction tube length	-	-
Suction tube diameter	-	42 mm
Suitable for drums or tanks	modular	customisable 1"



No. 1 packing
m³ 0,010
kg 4,7

No. 1 packing
m³ 0,010
kg 5,2