



**Ratio 1:1 Capacity 35 l/min**


**VITON Seals**

**Air-operated pumps for short and medium-distance transfer.**


Ideal for transferring low/medium-viscosity fluids such as: oils, lubricants and allied products.





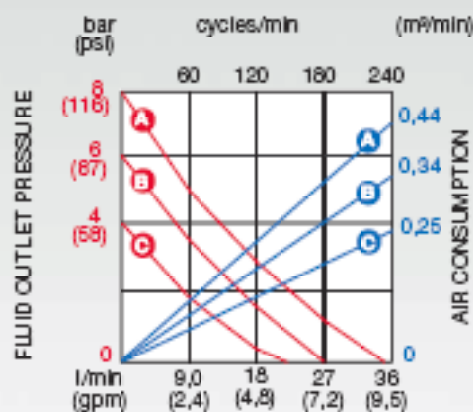

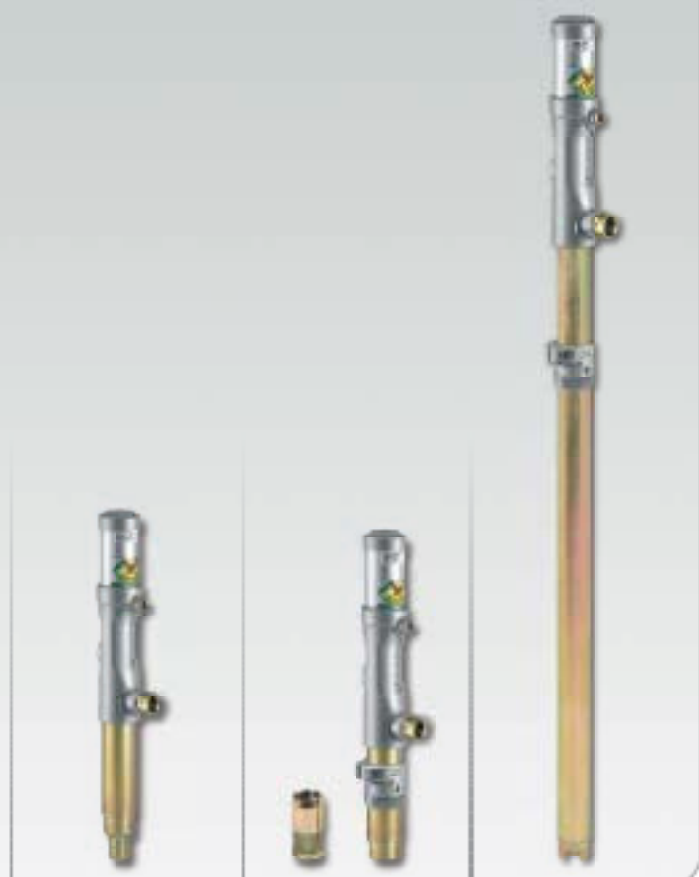


The wall-mounted version of these pumps, mounted on wall or in a fixed position by means of the special accessories (refer to page 204), enables numerous uses through the application of modular extensions (refer to page 232).

**A** 8 bar (116 psi)      **B** 6 bar (87 psi)      **C** 4 bar (58 psi)



KIND OF FLUID: SAE15 oil (ISO VG 100) - 20 °C



Article	26090	26091	26094
Compatible fluids	Oils, lubricants and similar		
Type of seals	VITON	VITON	VITON
Suction tube upper body	aluminium	aluminium	aluminium
Suction tube	carbon steel	carbon steel	carbon steel
Compression ratio	1:1	1:1	1:1
Air inlet connection	F1/4" G	F1/4" G	F1/4" G
Fluid outlet connection	F3/4" G	F3/4" G	F3/4" G
Air working pressure	6-8 bar	6-8 bar	6-8 bar
Air max. pressure	8 bar	8 bar	8 bar
Relative flowrate (free outlet at 8 bar)	35 l/min	35 l/min	35 l/min
Noise level	81 dB	81 dB	81 dB
Deliverable oil temperature	-10+50°C	-10+50°C	-10+50°C
Max. deliverable oil viscosity	130 SAE	130 SAE	130 SAE
Suction tube length	-	-	940 mm
Suction tube diameter	50 mm	50 mm	50 mm
Suitable for drums or tanks	modular	customisable 1*	with drum (180-220kg)
			
modular	customisable 1*	with drum	
 No. 1 packing m <sup>3</sup> 0,010	 No. 1 packing m <sup>3</sup> 0,010	 No. 1 packing m <sup>3</sup> 0,020	
 kg 5,6	 kg 6	 kg 7,2	